

# SANITARY PRESSURE REDUCING VALVE


Xiamen Yiluo Import and Export Trading Co., Ltd  
Mr.Chen  
Phone: +8613718536739  
Whatsapp: +8613718536739  
Email: hhuccjg@gmail.com



## Technical Data

| Item                       | Specification                                       |
|----------------------------|-----------------------------------------------------|
| Technical Data             | DN15-DN80, 1/2" - 4"                                |
| Execution Standard         | ISO, IDF, DIN, 3A, SMS                              |
| Applicable Temperature     | -20℃ ~ 180℃                                         |
| Max Inlet Pressure         | 2.5MPa                                              |
| Adjustable Outlet Pressure | 0 ~ 1.0MPa                                          |
| Valve Body Material        | SUS304, SUS316L                                     |
| Connection Type            | Threaded, Tri-clamp (Quick-install), Welded, Flange |
| Sealing Material           | EPDM, FPM, SI                                       |
| Applicable Medium          | Steam, Nitrogen, Carbon Dioxide, Water, etc.        |
| Applicable Industry        | Dairy products, Beer, Food, Beverages               |

## J81F Sanitary Quick-install Pressure Reducing Valve External Dimensions

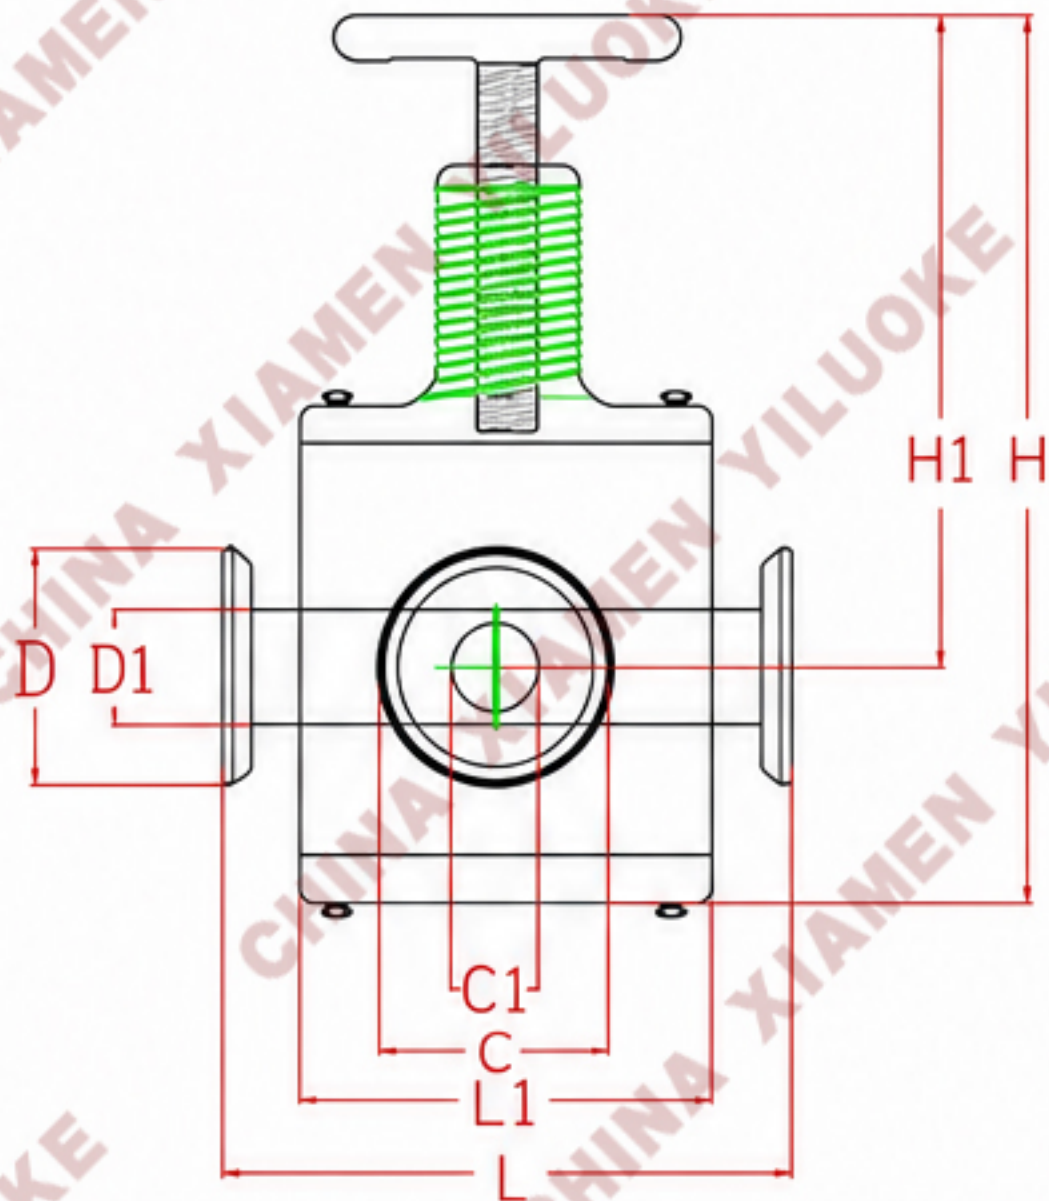

## J81F Sanitary Quick-install Pressure Reducing Valve External Dimensions

Unit: mm

| 规格         | D    | D1   | C    | C1 | L   | L1  | H   | H1  |
|------------|------|------|------|----|-----|-----|-----|-----|
| 1/2' DN15  | 25   | 12.7 | 50.5 | 19 | 125 | 90  | 245 | 190 |
| 3/4' DN20  | 50.5 | 19   |      |    |     |     |     |     |
| 1' DN25    |      | 25   |      |    |     |     |     |     |
| 1.25' DN32 | 50.5 | 32   |      |    | 145 | 110 | 260 | 200 |
| 1.5' DN40  |      | 38   |      |    |     |     |     |     |
| 2' DN50    | 64   | 51   |      |    |     |     |     |     |